


Osnovna povezava

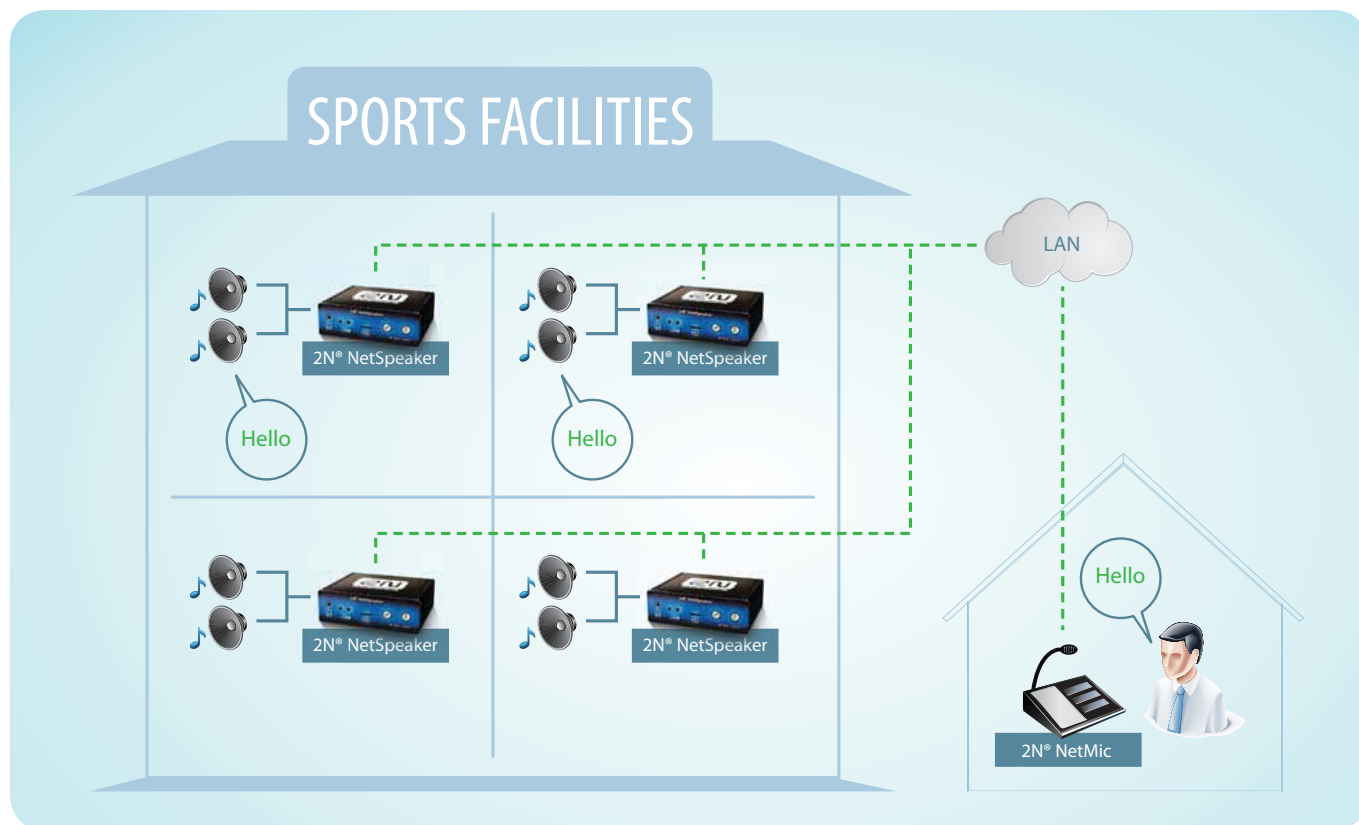

Tehnični parametri

Napajanje

12 do 32V, max. 1A
PoE napajanje

Priključki

Logični vhodi	2 vhoda; od 5 do 48V
Rele	1 rele NO in NZ kontakt; 48V, 1A
Priključek za slušalke	jack 3.5mm, stereo, 2 x 30mW, min. impedanca 160hm, DR 101dB, THD+N -85dB
Vhod za mikrofonski	simetričen, XLR, 24V, DR 88dB, THD+N -82dB
Vhod za slušalke (mikrofonski)	jack 3.5mm, DR 84dB, THD+N -78dB
Vhod	jack 3.5mm, simetrični mono ali nesimetrični stereo, DR 93dB, THD+N -82dB

Avdio

Zvočnik	PCM, 44 100kHz, 16bit, Stereo 2 integrirana; 2 x 1W
---------	--

Dimenzije


209 x 65 x 143 mm

Delovna temperatura

0 - 40°C

Tipke

Napis	39.6mm širina x 9mm višina
Velika tipka (govori)	25.5mm x 12mm
Mala tipka (poslušaj)	12mm x 12mm

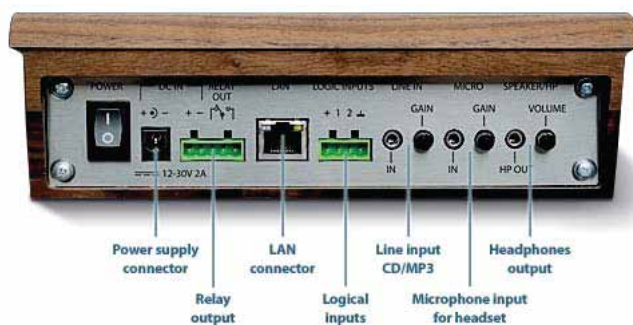

2N® NetSpeaker Control Panel